

CTS 100**PNEUMATIC SEALING TOOL FOR POLYPROPYLENE
AND POLYESTER STRAP WITH VIBRATION SEALING**

MODEL

CODE	TYPE	STRAP	THICKNESS
C1069414	CTS 100 / 16 - 19 mm	PP-PET 16 -19 mm • 5/8" - 3/4"	0.4 -1.4 mm 0.016"- 0.055"
C1025814	CTS 100 / 25 mm	PET 25mm • 1"	0.8-1.4 mm 0.032"-0.055"

TECHNICAL SPECIFICATIONS

DIMENSIONS

Length	250 mm • 9.8"
Width	130 mm • 5.1"
Height	120 mm • 4.7"
Weight	2.6 Kgs • 5.7 lbs



FEEDING

Pressure range	4.5 - 7 bar / 64 - 99 psi
Air consumption	-

PERFORMANCE

Max. tension force	-
Tensioning speed	-
Sealing	friction weld seal
Joint strength	80% of breaking strength*
Gear ratio	-

* variable according to strap type

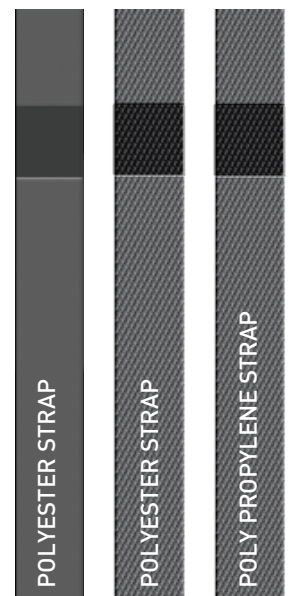

Compact Technologies
15th Floor, Suite#1500 -701 West Georgia St.
Vancouver, BC, V7Y 1C6
Canada
T: +1 (604) 801-5922
F: +1 (604) 801-5911
www.compacttechnologies.com

COMPACT
TECHNOLOGIES