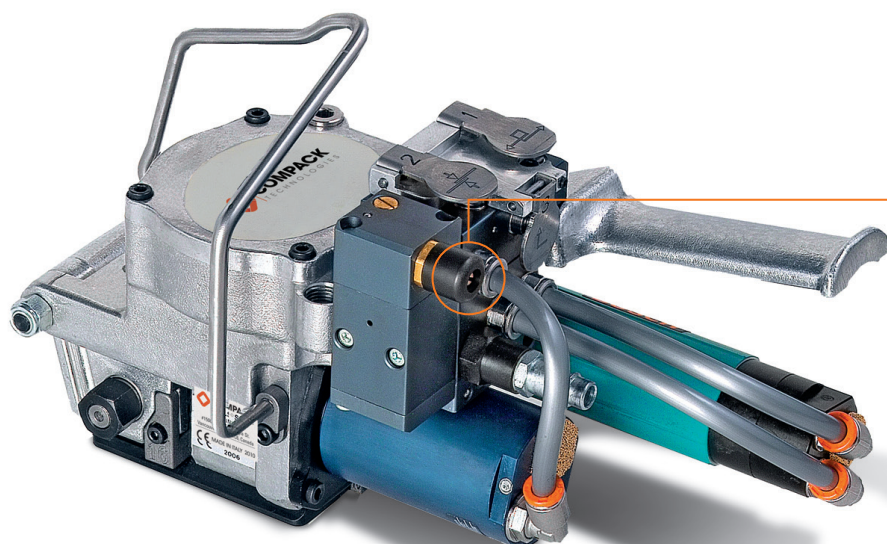


**CTS 1250**PNEUMATIC STRAPPING TOOL FOR  
POLYESTER STRAP WITH VIBRATION SEALING

New system for welding  
time adjustment

**MODEL**

CODE	TYPE	STRAP	THICKNESS
C12569114	CTS 1250 /16-19mm	PET 16-19 mm • 5/8" - 3/4"	1-1.4 mm 0.04"-0.055"

**TECHNICAL SPECIFICATIONS****DIMENSIONS**

Length	300 mm • 11.8"
Width	150 mm • 6"
Height	175 mm • 6.9"
Weight	5.1 Kgs 11.2 lbs


**FEEDING**

Pressure range	4.5 -7 bar / 64-99 psi
Air consumption	14 L/s – 29 cuft/min

**PERFORMANCE**

Max. tension force	5000 N - 6.5 bar / 92 psi
Tension speed	6 mt/m
Sealing	Vibration sealing
Joint strength	80% of breaking strength*
Gear ratio	-

\* variable according to strap type

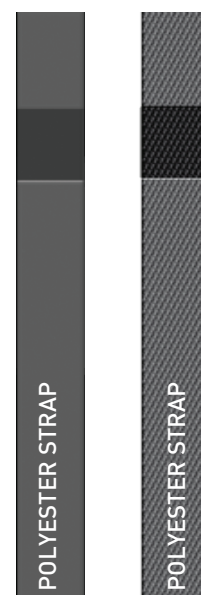

Compact Technologies  
15th Floor, Suite#1500 -701 West Georgia St.  
Vancouver, BC, V7Y 1C6  
Canada  
T: +1 (604) 801-5922  
F: +1 (604) 801-5911  
www.compacttechnologies.com

**COMPACT**  
TECHNOLOGIES