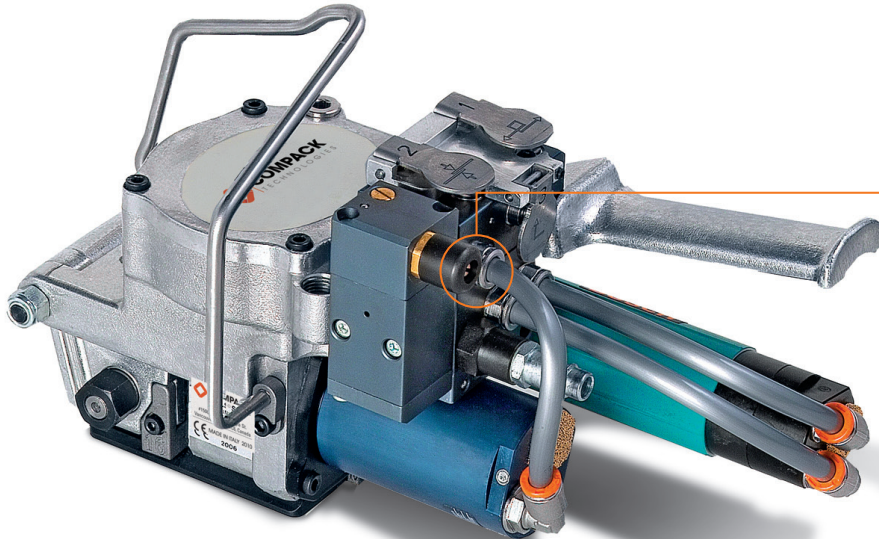


CTS 1350PNEUMATIC STRAPPING TOOL FOR
POLYESTER STRAP WITH VIBRATION SEALING

New system for welding
time adjustment

**MODEL**

CODE	TYPE	STRAP	THICKNESS
C13552812	CTS 1350 /25-32mm	PET 25-32 mm • 1" - 1 1/2"	0.8 -1.27 mm 0.04"-0.050"

TECHNICAL SPECIFICATIONS**DIMENSIONS**

Length	300 mm • 11.8"
Width	160 mm • 6.3"
Height	175 mm • 6.9"
Weight	5.8 Kgs 7.9 lbs


FEEDING

Pressure range	6 -7 bar / 87-99 psi
Air consumption	14 L/s – 29 cuft/min

PERFORMANCE

Max. tension force	5500 N - 6.5 bar / 92 psi
Tension speed	4 mt/m
Sealing	Vibration sealing
Joint strength	80% of breaking strength*
Gear ratio	-

* variable according to strap type

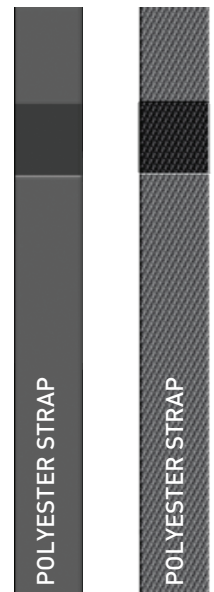

Compact Technologies
15th Floor, Suite#1500 -701 West Georgia St.
Vancouver, BC, V7Y 1C6
Canada
T: +1 (604) 801-5922
F: +1 (604) 801-5911
www.compacttechnologies.com

COMPACT
TECHNOLOGIES