



CTS 450

PNEUMATIC STRAPPING TOOL FOR POLYPROPYLENE
AND POLYESTER STRAP WITH VIBRATION SEALING

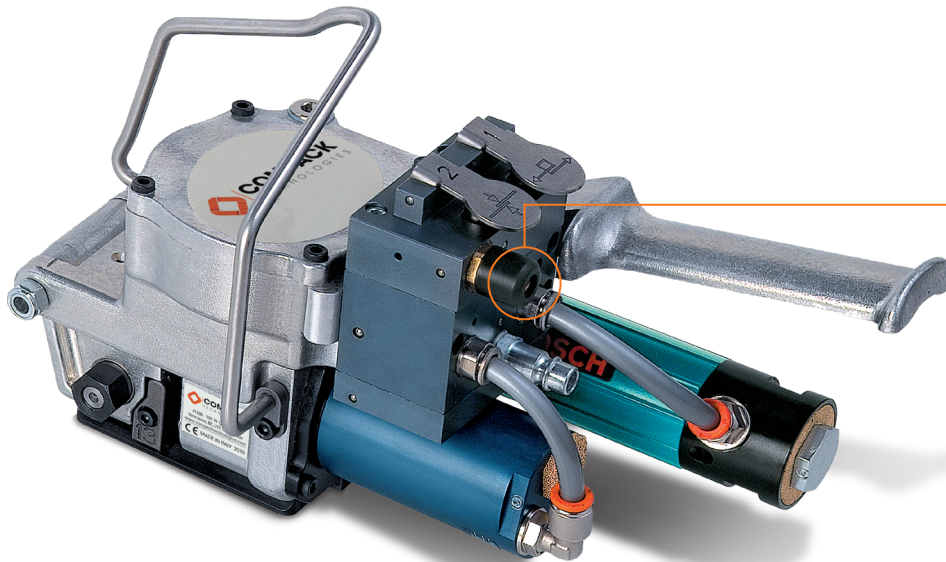

New system for welding
time adjustment

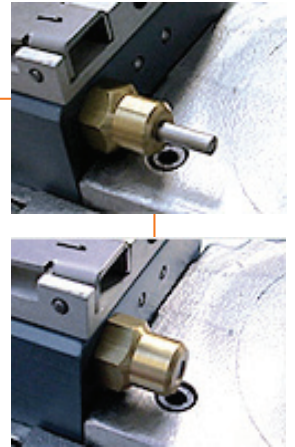

MODEL

CODE	TYPE	STRAP	THICKNESS
C4510412	CTS 450 -10mm *	PP-PET 10 mm • 3/8"	0.4-1.2 mm 0.016"-0.047"
C4513412	CTS 450 -13mm *	PP-PET 13 mm • 1/2"	0.4-1.2 mm 0.016"-0.047"
C4569412	CTS 450 -16/19mm *	PP-PET 16-19 mm • 5/8"-3/4"	0.4-1.2 mm 0.016"-0.047"

** only with friction on tensioning

TECHNICAL SPECIFICATIONS

DIMENSIONS

Length	280 mm • 11"
Width	150 mm • 6"
Height	175 mm • 6.9"
Weight	4.9 Kgs • 10.8 lbs


FEEDING

Pressure range	4.5 -7 bar / 64-99 psi
Air consumption	14 L/s – 29 cuft/min

PERFORMANCE

Max. tension force	2500 N - 6.5 bar- 92psi (variable with friction)
Tensioning speed	11 ml/m
Sealing	Vibration sealing
Joint strength	80% of breaking strength*
Gear ratio	-

* variable according to strap type

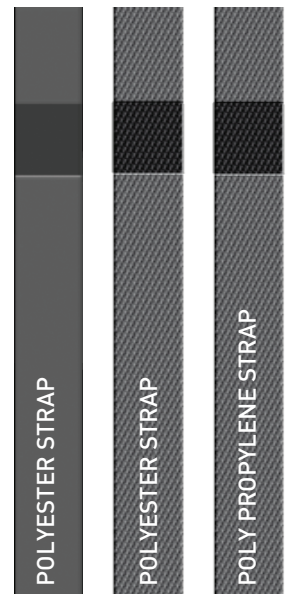

Compact Technologies
15th Floor, Suite#1500 -701 West Georgia St.
Vancouver, BC, V7Y 1C6
Canada
T: +1 (604) 801-5922
F: +1 (604) 801-5911
www.compacttechnologies.com

COMPACT
TECHNOLOGIES