

CTS 400

BATTERY POWERED FRICTION WELD STRAPPING TOOL

**MODEL**

| CODE | TYPE | STRAP | THICKNESS |
|----------|-----------------|--------------------------------|----------------------------------|
| C4069510 | CTS 400/13-16mm | PP-PET 13-16 mm • 1/2"-5/8" | 0.5 - 1.05 mm 0.019" - 0.041" |

TECHNICAL SPECIFICATIONS**DIMENSIONS**

| | |
|--------|-------------------|
| Length | 290 mm • 11.4" |
| Width | 140 mm • 5.5" |
| Height | 165 mm • 6.5" |
| Weight | 3.6 Kgs • 7.9 lbs |


FEEDING

| | |
|---------|-------------------|
| Battery | 14.8V-2 A/h LI-PO |
|---------|-------------------|

PERFORMANCE

| | |
|--------------------|------------------------|
| Max. tension force | 2200 N |
| Tensioning speed | 12 mi/m |
| Sealing | Friction weld seal |
| Joint strength | 80% of strap strength* |
| Gear ratio | - |

* Depends on strap quality

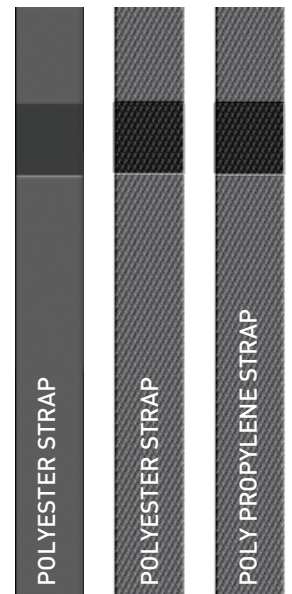

Compact Technologies
 15th Floor, Suite#1500 -701 West Georgia St.
 Vancouver, BC, V7Y 1C6
 Canada
 T: +1 (604) 801-5922
 F: +1 (604) 801-5911
www.compacttechnologies.com

COMPACT
 TECHNOLOGIES