
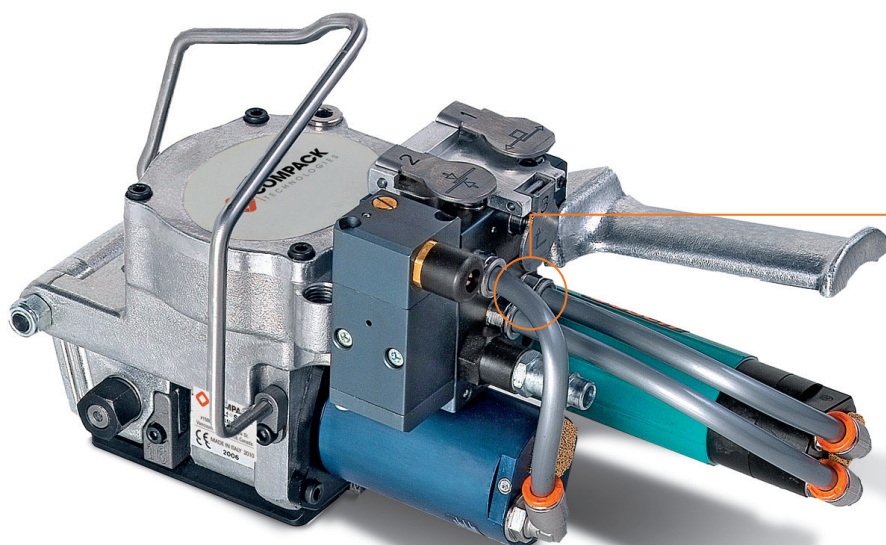


CTS 850**PNEUMATIC STRAPPING TOOL FOR POLYPROPYLENE
AND POLYESTER STRAP WITH VIBRATION SEALING**

New cooling welding
time indicator



MODEL

CODE	TYPE	STRAP	THICKNESS
C8513714	CTS 850 / 13mm	PP-PET 13 mm • 1/2"	0.7-1.4 mm 0.028" - 0.055"
C8569714	CTS 850 / 16-19mm	PP-PET 16-19 mm • 5/8" - 3/4"	0.7-1.4 mm 0.028" - 0.055"

TECHNICAL SPECIFICATIONS

DIMENSIONS

Length	300 mm • 11.8"
Width	150 mm • 6"
Height	175 mm • 6.9"
Weight	5.1 Kgs 11.2 lbs


FEEDING

Pressure range	4.5 -7 bar / 64-99 psi
Air consumption	14 L/s - 29 cuft/min

PERFORMANCE

Max. tension force	3500 N - 6.5 bar / 92 psi
Tension speed	9 mt/m
Sealing	Vibration sealing
Joint strength	80% of breaking strength*
Gear ratio	-

* variable according to strap type

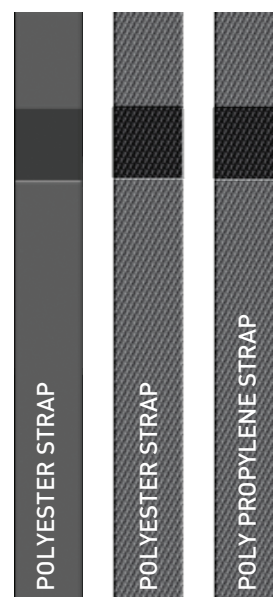

Compact Technologies
15th Floor, Suite#1500 -701 West Georgia St.
Vancouver, BC, V7Y 1C6
Canada
T: +1 (604) 801-5922
F: +1 (604) 801-5911
www.compacttechnologies.com

COMPACT
TECHNOLOGIES