


Joinpack

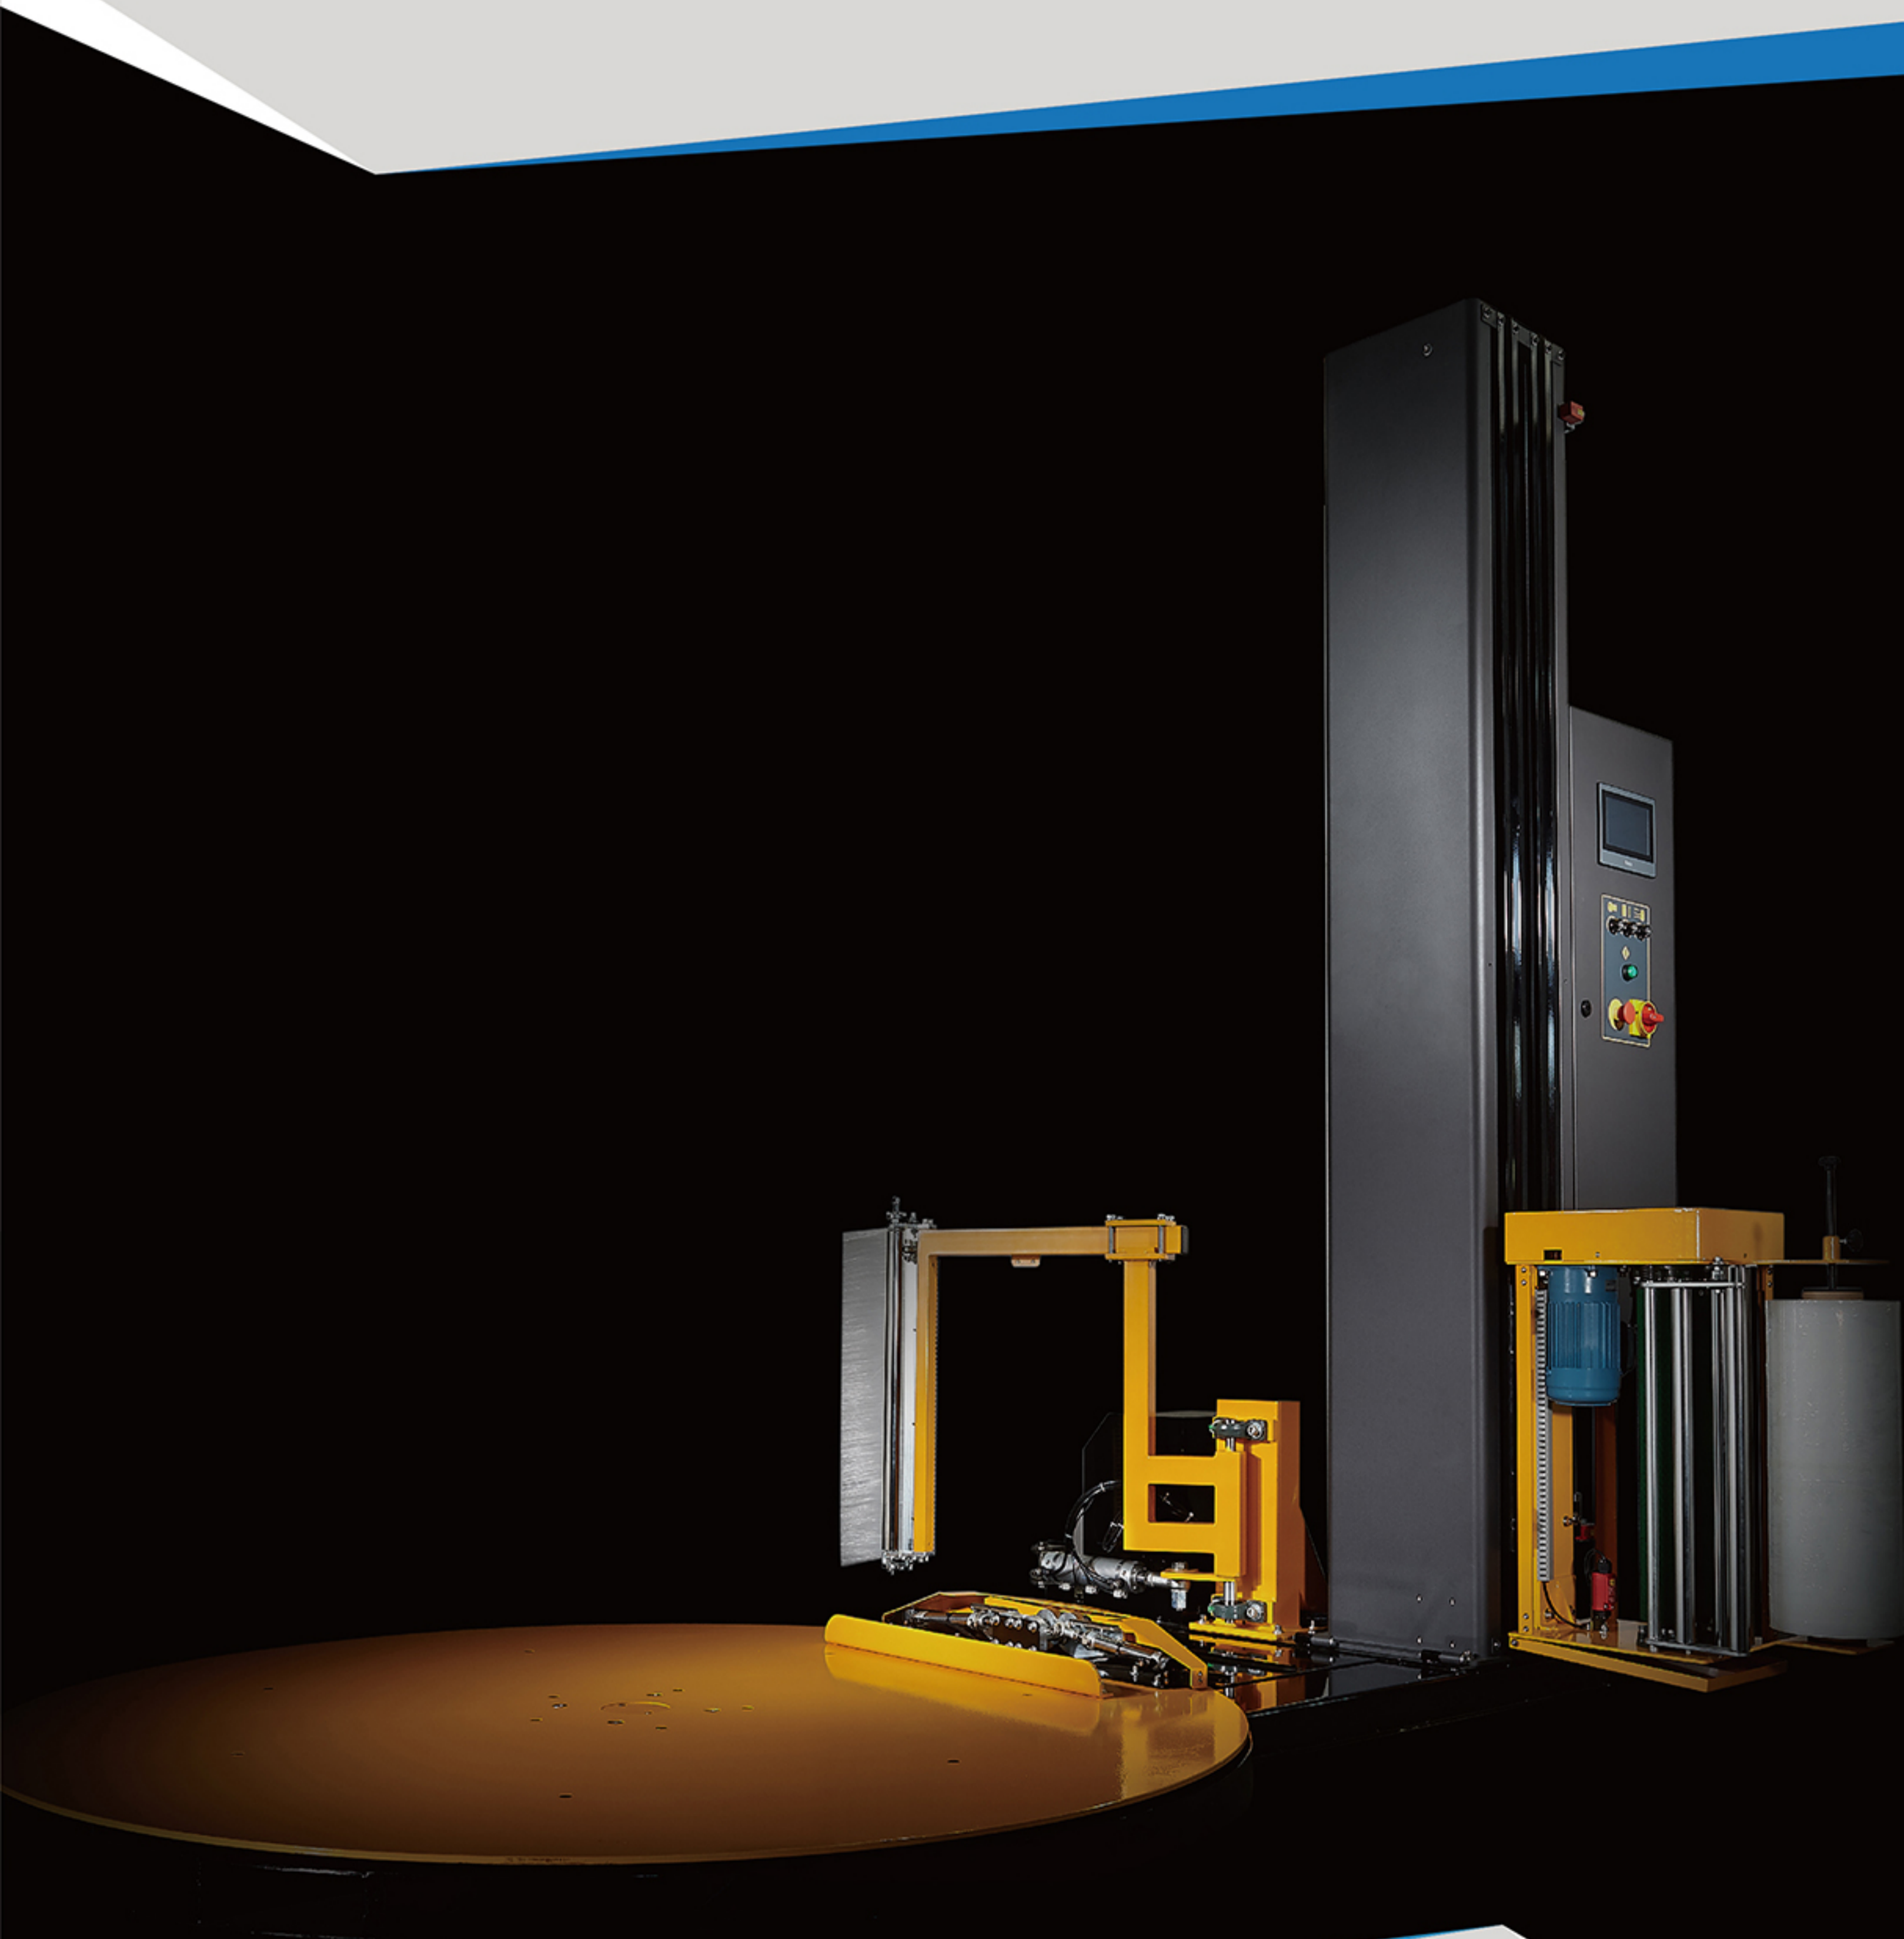


STRETCH WRAPPING MACHINE
THE SUM OF ALL SOLUTIONS

Semi-auto Series

Reliable & Efficiency wrapper.
Compact & Intelligent design.
For general applications.

ALPHA-2000 PLUS

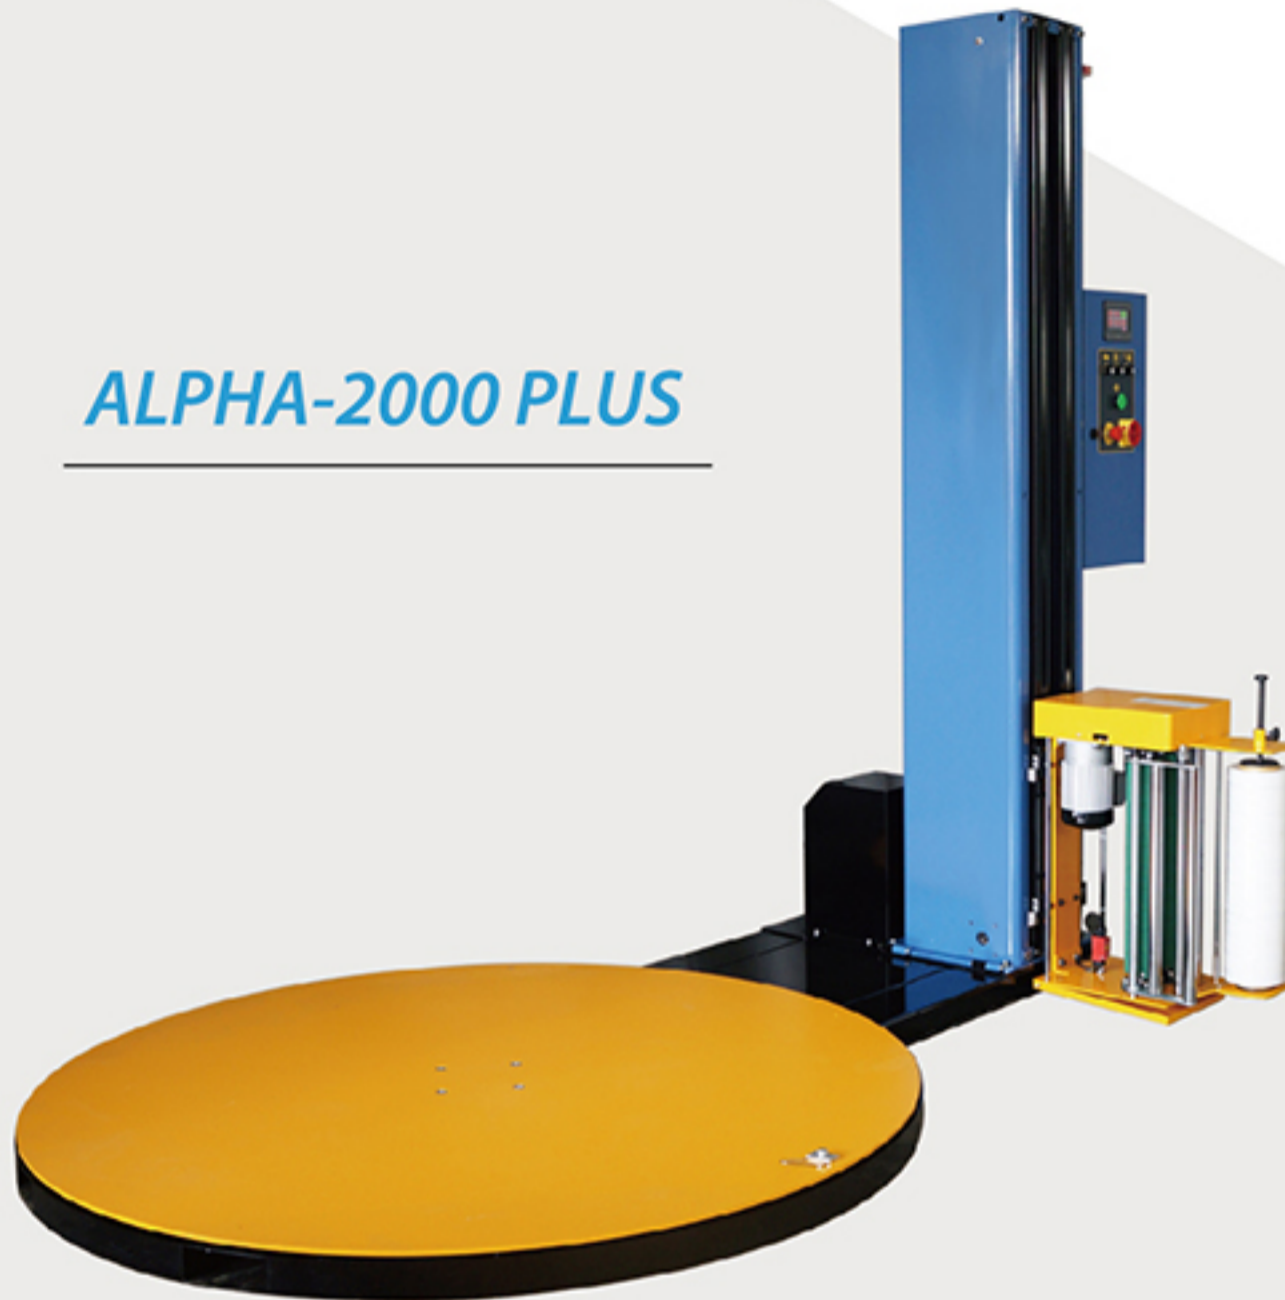

FEATURES

- User friendly HMI touch panel
- 3 auto wrapping programs built-in
- Proximity sensors for loading height detect
- Turntable and film carriage speed adjustable
- Film tension adjustable (Electromagnetic brake system)
- Turntable soft-start, soft-stop and home position
- Auto film tear-off (without pre-stretch)
- Top sheet applied
- Middle reinforcement

OPTIONS

- Pre-stretch system 50%,100%,150%,200% (specified)
Note :100% means 1 M → 2 M
- Various column height
- Access ramp
- Top press platen
- Easy-Insert



ALPHA-AL

- Auto film clamp, cut and wiper system
- Remote control to start & stop

Auto Series

Fully automated inline wrapping system.
Comprehensively correspondence with
variety of applications.

FEATURES

- Durable gear bearing rotation structure
- Auto sensor for loading height detect
- Individual control box with HMI touch panel
- Film carriage with powered pre-stretch system
- Rotation soft-start, stop & home position


ALPHA-HCA

- Turntable with power roller or chain
- Auto film clamp, cut & wiper system
- Turntable & film carriage speed adjustable



ALPHA-HR

- For 3 dimensional reel wrapping
- Turntable & film carriage speed adjustable

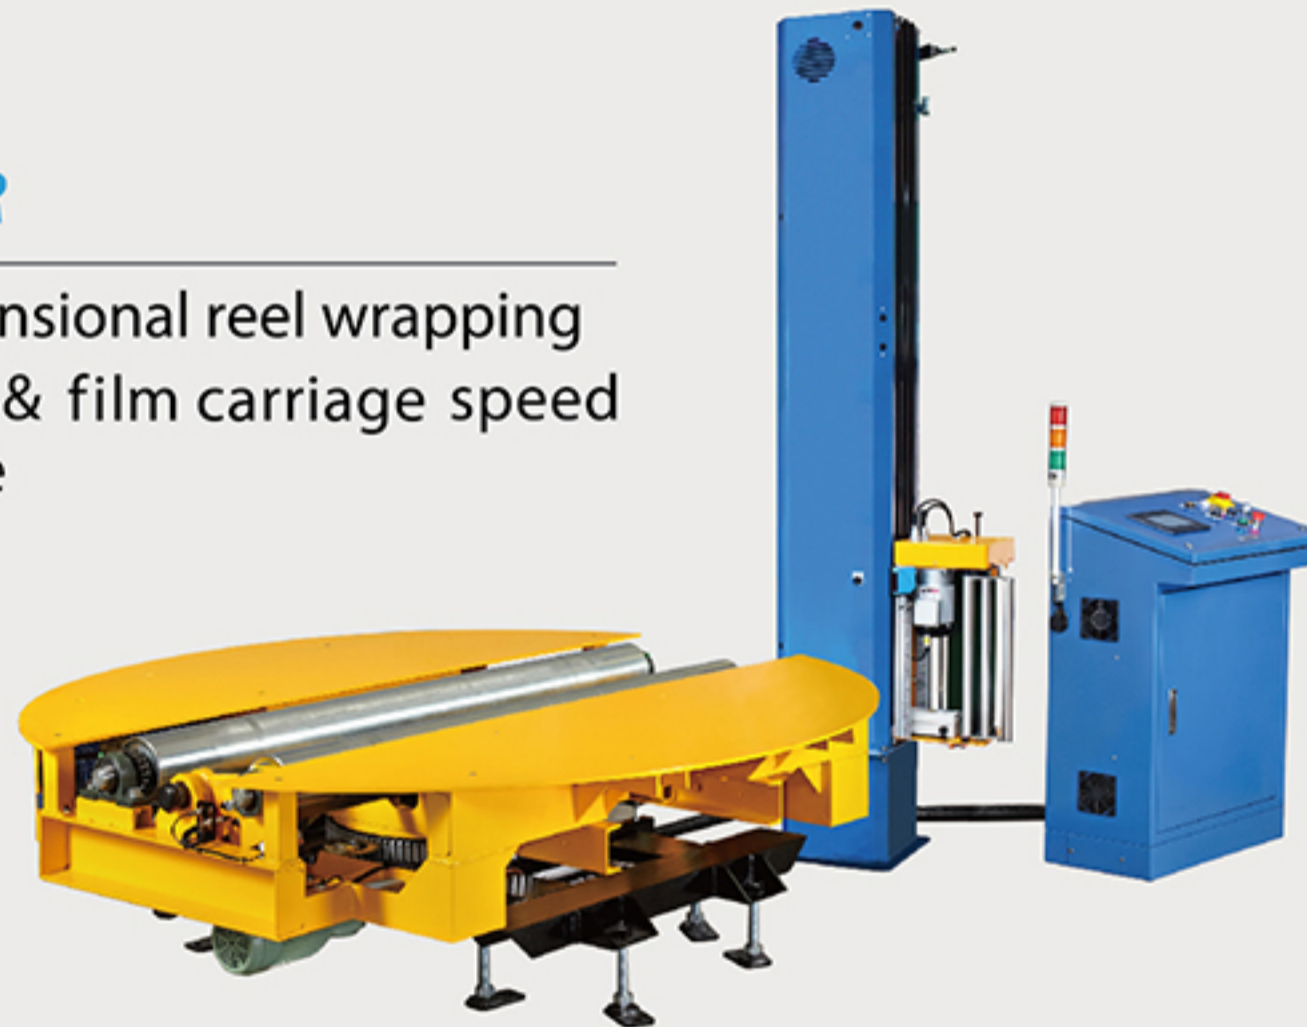

OPTIONS (HCA)

- Heat sealing plate
- Top sheet applicator
- Top press platen
- Safety fence

ALPHA-WA

- Rotating arm with heavy duty bearing ring
- Auto film clamp, cut & wiper system
- Rotary arm & film carriage speed adjustable
- Safety fence

OPTIONS

- Heat sealing plate
- Top sheet applicator
- Top press platen
- Double arm with twin film carriages




FEATURES

- Orbital wrapping
- Auto film clamp, cut system
- Manually mechanical film tension adjustment
- Rotating speed adjustable
- Film roll easy change
- Individual control box with HMI touch panel

OPTIONS

- Top press device
- Variety of film roll width design
- Integrated with battens loading & strapping system

ALPHA-SPA

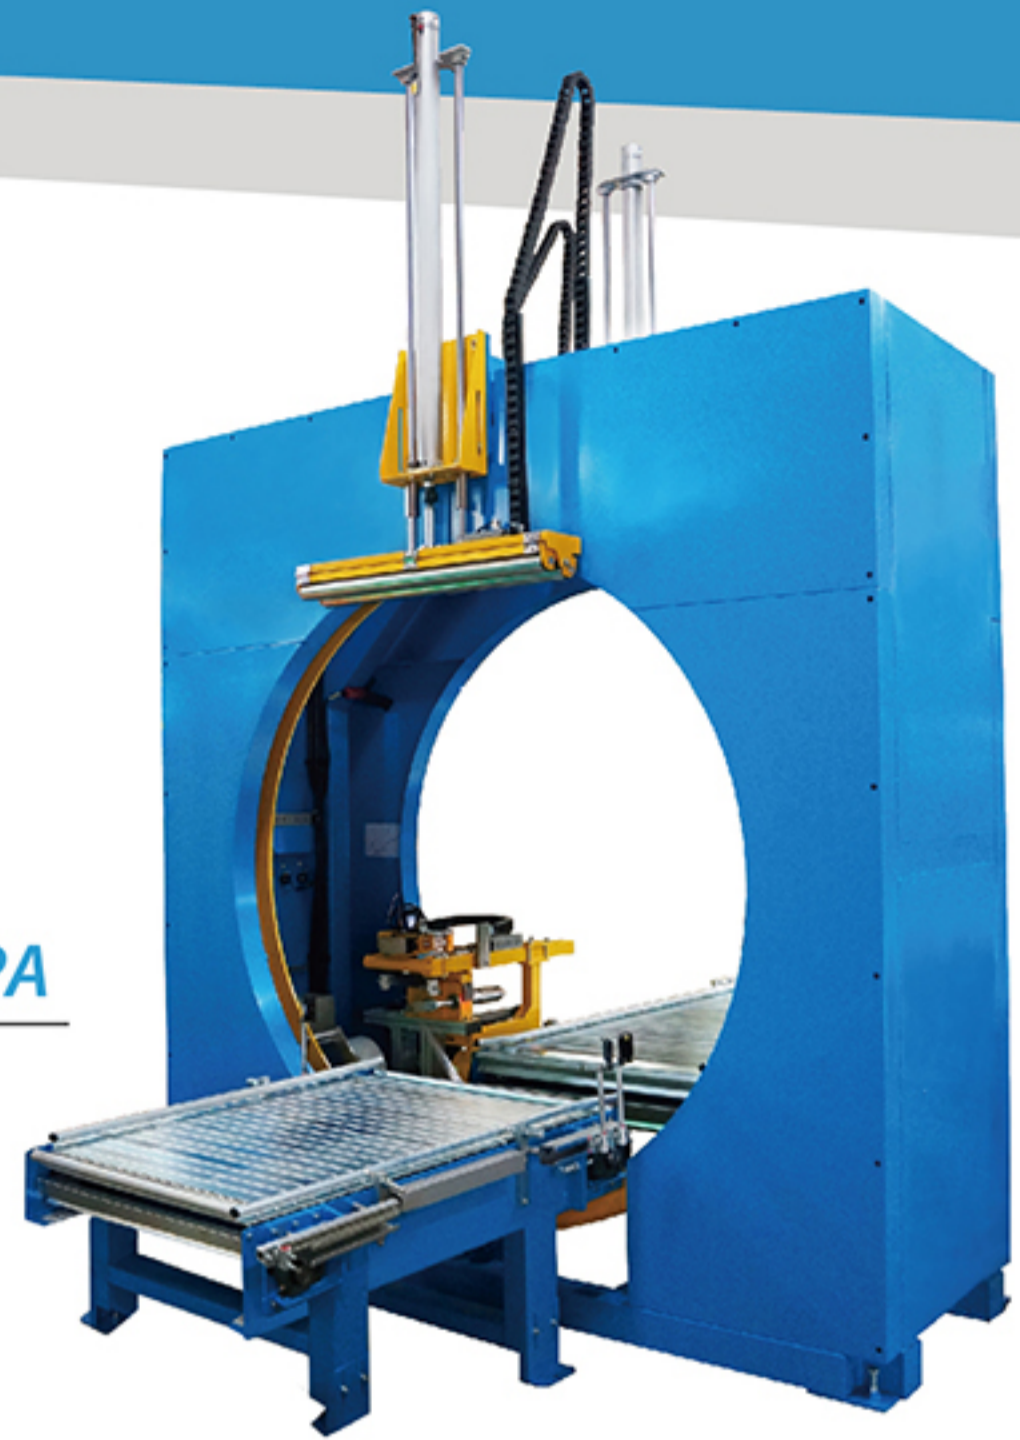

SPECIFICATIONS

Specs	Models	SEMI-AUTO SERIES		AUTO SERIES			
		ALPHA-2000+	ALPHA-AL	ALPHA-HCA	ALPHA-HR	ALPHA-WA	ALPHA-SPA
Turntable dia. (mm)		1500/1800	1800	Customize			
Wrapping height (mm)		2100/2400			Customize		
Max. pallet weight (kgs)		2000		Customize			
Rotating speed (R.P.M)		5 ~15		3 ~15		4 ~15	4 ~ 30
Film carriage speed (m/min)		2 ~ 5					
Film roll I.D. (φ76 x W 500 mm)		Standard equipped					Customize
Power consumption (KW)		1.4		3		2.3	3
Power supply (50/60, Hz)		110/220/230/240V, 1PH 220/230/380/415/440V, 3PH		220/230/380/415/440V, 3PH			
Dimension (L x W x H mm)		L 2639 W 1500 H 2374	L 3019 W 1800 H 2374	L 3185 W 2000 H 2724	L 3190 W 2000 H 2398	L 3700 W 4250 H 3500	L 1246 W 2700 H 3645
Machine net weight (kgs)		660	800	1200	1500	2000	1500
Pre-stretch ratio (50%,100%,150%,200%)		Specified					

* Specifications subject to change without notice



JIA-IN INDUSTRY CO., LTD.

T +886 4 2359 4966
F +886 4 2359 2449
E info@joinpack.com
www.joinpack.com

